

# 1 Eliminate wasted energy

Resource  
consumption cut

Productivity UP

Added Value UP


**Mid-temperature Range accurately control**

Chiller and temperature controller are combined into one to drive efficiently. Highly accurate temperature control even in the toughest range of 30 - 50°C.

## Widerange Temperature Controller

### Overview

Compact temperature controller covers a wide range of temperatures, from 8 °C (chiller) to 90 °C (temperature controller). Molding is possible with one unit without reconnecting the chiller and temperature controller.

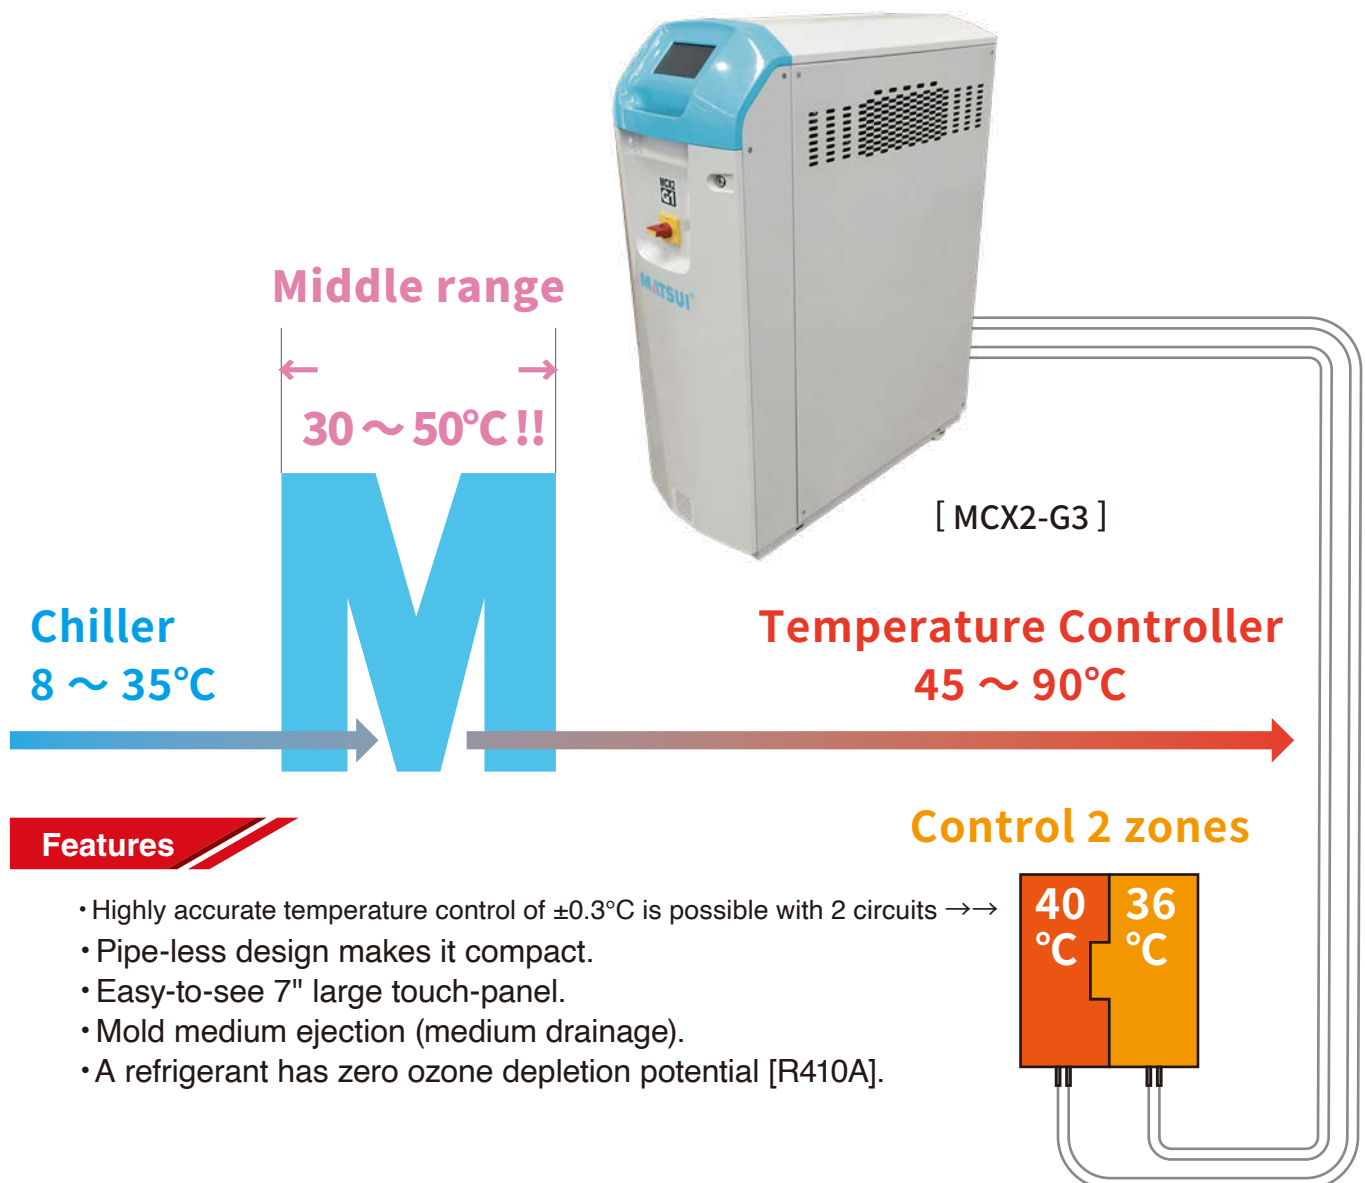

### Features

- Highly accurate temperature control of  $\pm 0.3^{\circ}\text{C}$  is possible with 2 circuits →→
- Pipe-less design makes it compact.
- Easy-to-see 7" large touch-panel.
- Mold medium ejection (medium drainage).
- A refrigerant has zero ozone depletion potential [R410A].

